

# LIGO AL11200 ROUND



## Benefits

- Luminaire housing has a high resistance to UV and is treated with highly antioxidant water-repellent lubricating solution to lengthen lifespan
- Strong luminaire body can withstand a maximum static pressure load 2500kg for use in high traffic areas
- Stainless steel finish ideal for architectural use
- High efficiency thermoplastic with high vacuum deposit for heightened luminaire care
- Design allows for ease of maintenance

- Powder coated die cast aluminium EN AB 44100 body
- Protective undercoating phosphochromate treatment
- Sealed to IP67
- AISI 316L stainless steel trim
- Techno polymer Rough in Housing 017 / 18 / 19
- Soda-lime tempered glass 12mm
- Silicon sealing gasket
- Supplied with pre-wired cable 0.5m long HO7RN8-F with brass cable gland M20 Ø 7 / 13mm
- Wire through connection available on request
- Drainage area 300mm
- Maximum static pressure load 2500kg

## Applications

- Architectural
- In ground / surface recessed

## Beam Types

- 14°
- 29°
- 62°

## Colours

-  Stainless

## Technical Features


- In ground recessed uplighter
- Non-integral driver

	Lamp Wattage	Power Supply	LED	Beam	Colour Temp. **	Touch Temp.	Lm	Fixture Colour	Rough Inground Casting Box	LED Driver
<b>AL11201</b>	18W	Max 500mA 50/60HZ	1 LED	14°	3000	<70	1957	Stainless	017	Non-integral*
<b>AL11202</b>	18W	Max 500mA 50/60HZ	1 LED	29°	3000	<70	1957	Stainless	018	Non-integral*
<b>AL11203</b>	18W	Max 500mA 50/60HZ	1 LED	62°	3000	<70	1957	Stainless	019	Non-integral*

\*\* Other colour temperatures available on request


## Key features

**1.**

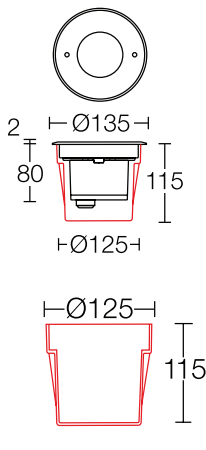

**Dimensions**


**2.**



**Polar Intensity Diagram**

**AL11201**  
Luminaire: 18W 3000K  
Lamp: 1 LED  
Power: Max 500mA 50/60HZ


**3.**



**Polar Intensity Diagram**

**AL11202**  
Luminaire: 18W 3000K  
Lamp: 1 LED  
Power: Max 500mA 50/60HZ

**4.**



**Polar Intensity Diagram**

**AL11203**  
Luminaire: 18W 3000K  
Lamp: 1 LED  
Power: Max 500mA 50/60HZ

All dimensions are in mm.

\* Please enquire regarding drivers when requesting quotation and ordering.