

TURAIS AL11500 UP / DOWNLIGHT



Benefits

- Powerful LEDs offer energy savings and cost reduction for maintenance
- External fixings have a high resistance to UV and are treated with antioxidant water-repellent lubricating solution to lengthen lifespan
- Housing is highly resistant to oxidation for prevention of damage to luminaire interior
- Highly efficient thermoplastic with high vacuum deposit for heightened luminaire care
- Design allows for ease of maintenance

- Stainless steel A4-70 treated external fixings
- Die cast aluminium housing with EN-AB 47100 standard and high resistance to oxidation
- Soda-lime tempered glass 3mm
- Silicon sealing gasket
- Cable entry EPDM cable-gland free of halogens Ø 8 / 12mm
- Second cable entry available with the Turais
- Available in anthracite or light grey for architectural use
- Available in a standard or emergency version

Applications

- Architectural
- Surface Mounted

Beam Types

- 38°

Colours

- Anthracite
- Light grey


Technical Features

- Wall mounted up / downlighter
- Integral driver
- Double powder coated polyester finish with high resistance to UV and oxidation
- Sealed to IP65 and IK06 rated


	Lamp Wattage	Power Supply	LED	Beam	Colour Temp.**	LED Driver	Lm	Fixture Colour	Emergency Version
AL11503	14W	220-240V 50/60HZ	2 x 7	38°	3000	Integral	2 x 819	Anthracite	Available*
AL11504	14W	220-240V 50/60HZ	2 x 7	38°	3000	Integral	2 x 819	Light grey	Available*

** Other colour temperatures available on request

Key features

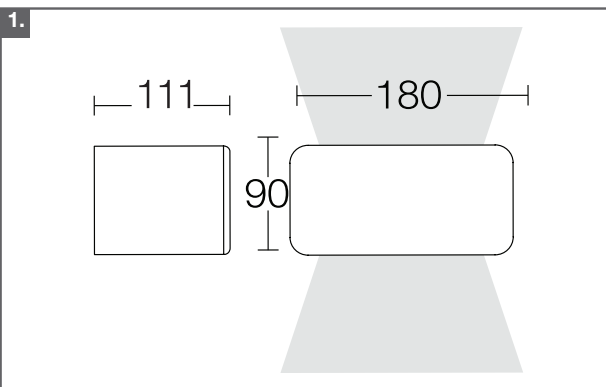

Dimensions

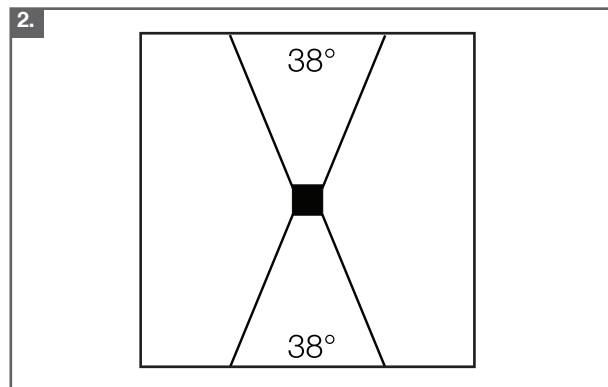

Beams

All dimensions are in mm.

* Please enquire regarding emergency version when requesting quotation and ordering.