


OCTAGONAL

4-12M OCTAGONAL STEEL


Designed to EN40. Hot dip galvanised to BS EN1461:1999

Flange Plate


Type 0 FA000G Bolts/cross brace M16 x 500mm
FC020 Template




Type 1 FA001G Bolts/cross brace M20 x 500mm
FC021 Template

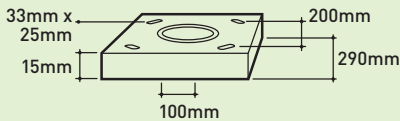

Type 2 FA002G Bolts/cross brace M24 x 600mm
FC022 Template

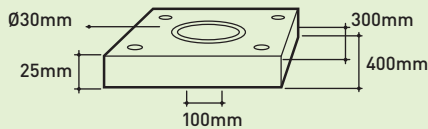

Column Dimensions

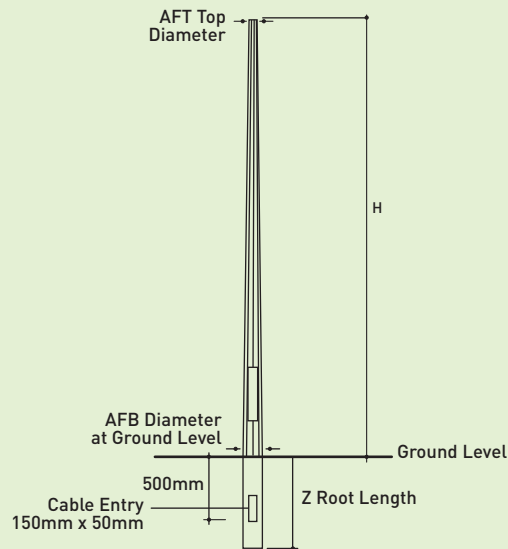

Accessories ELSAB1/6A Single fuse cut-out, 6A, loop in/out (not fitted) ELSAB12/6A Twin fuse cut-out, 6A, loop in/out (not fitted)

Brackets Contact the Abacus sales office for details.

Root Mounted

Dimensions (mm)						
Product Code	Height	AFT	AFB	z	Door Opening	Weight (kg)
F041	4m	76	130	600	500x75	35
F051	5m	76	144	800	500x85	50
F061	6m	76	158	1000	500x85	64
F081	8m	76	183	1200	600x115	93
F101	10m	76	210	1500	600x115	129
F121	12m	76	232	1700	600x115	260

*Root concrete diameter based on poor soil or better, min. 230kN/m²

Flange Plate Mounted

Dimensions (mm)						
Product Code	Height	TD	GD	Door Opening	Flange Plate	Weight (kg)
F041/FP	4m	60	107	500x75	Type 0	33
F051/FP	5m	76	134	500x85	Type 0	49
F061/FP	6m	76	146	500x85	Type 1	60
F081/FP	8m	76	169	600x115	Type 2	84
F101/FP	10m	76	193	600x115	Type 2	112
F121/FP	12m	100	230	600x115	Type 2	282